


SETUP SHEET

TRACK CONDITIONS			
Surface:	<input type="checkbox"/> Smooth	<input type="checkbox"/> Med.	<input checked="" type="checkbox"/> Bumpy
Size:	<input type="checkbox"/> Open	<input type="checkbox"/> Med.	<input checked="" type="checkbox"/> Tight
Traction:	<input type="checkbox"/> High	<input checked="" type="checkbox"/> Med.	<input type="checkbox"/> Low

Track Temp/Air Temp: 10 ° / 10 °
 Note: _____

FRONT SUSPENSION

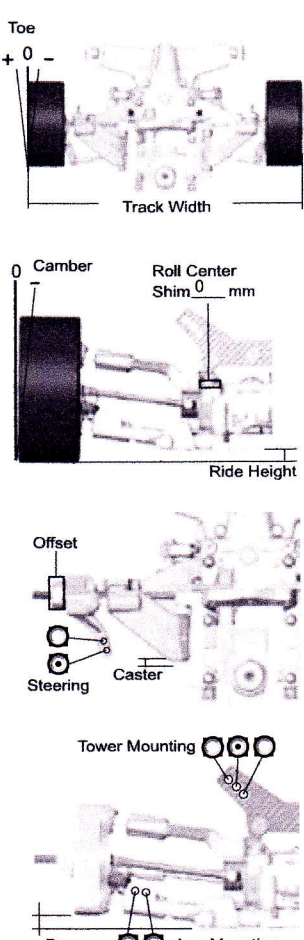

Track Width: 200 mm
 Anti-Roll Bar: horizontal

Diff. Fluid: 50000 wt
 One Way
 Solid Axle

Toe Angle: +2 °
 Front Camber: L -2 ° R -2 °
 Front Ride Height: 5 mm
 Front Droop: 1 mm
 Caster: 3 mm


Offset: +1.50 +0.75
 +0.0 -0.75

► TIRE
 Manufacture: ATS
 Shore: L 35 ° R 35 °
 Diameter(Start): L/R 60 / 60 mm
 Diameter(Finish): L/R ___ / ___ mm

► SHOCKS
 Oil: 350 wt
 Piston: Standard
 Spring: Serpent New Yellow

► ACKERMANN
 A B C D

REAR SUSPENSION

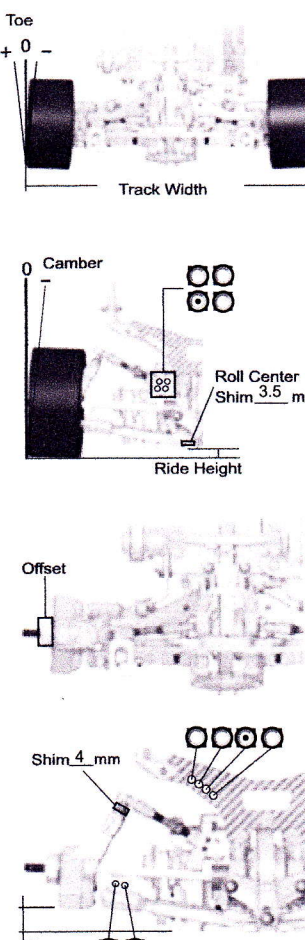

Track Width: 200 mm
 Anti-Roll Bar: 2.1(Silver)

Diff. Fluid: 20000 wt
 Solid Axle


Toe Angle: -2.5 °
 Rear Camber: L -4 ° R -4 °
 Rear Ride Height: 6 mm
 Rear Droop: 4 mm

Offset: +1.50 +0.75
 +0.0 -0.75

► TIRE
 Manufacture: ATS
 Shore: L 37 ° R 37 °
 Diameter(Start): L/R 62 / 62 mm
 Diameter(Finish): L/R ___ / ___ mm

► SHOCKS
 Oil: 350 wt
 Piston: Standard
 Spring: Serpent New Yellow

ENGINE

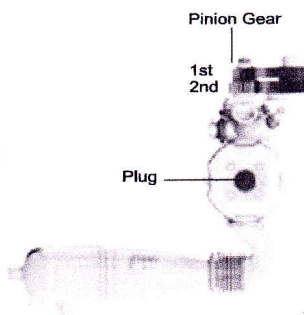

Gear Ratio: 1st 16 T / 62 T
 2nd 22 T / 56 T


Clutch Set Type:
 3 Shoe Push Type

Clutch Spring: Standard
 Clutch Shoe: Standard
 Clearance: 0.3 mm
 Engine: 12TZ
 Head Shim: 0.3 mm
 Plug: 6

Fuel: NASA FENRIR
 Muffer: DURAL-N 4.5 Exhaust vent
 Carb Dia: (12TG) 4.5 mm


Note: JMRCA New Rule

WHEELBASE

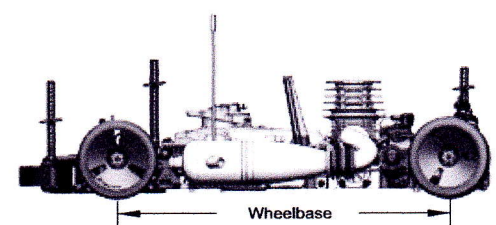

256 mm
 257 mm
 258 mm
 259 mm
 260 mm

BODY

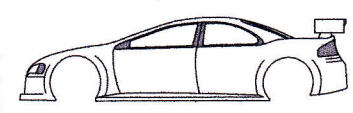

Body: Audi
 Wing Height: under from Roof
 Wing Position: Rear End Position
 Wing Angle: Normal